

KEY

- PROPOSED CARRIAGEWAY
- PROPOSED FOOTWAY
- PROPOSED FOOTWAY TO ALLOW VEHICULAR ACCESS
- PROPOSED VERGE
- PROPOSED KERBS
- PROPOSED EDGING
- PROPOSED RED COLOURED TACTILE PAVING
- PROPOSED BUFF CORDUROY TACTILE PAVING
- PROPOSED SIGN
- PROPOSED CYCLE BOLLARD
- PROPOSED RETRO-REFLECTIVE BOLLARD
- PROPOSED PEDESTRIAN GUARDRAIL (V2)
- PROPOSED FENCING BOUNDARY
- PROPOSED GATE
- PROPOSED TRAFFIC SIGNAL
- RELOCATED BUS STOP SIGN

- GENERAL NOTES**
1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL ENGINEER'S, ARCHITECT'S OR OTHER RELEVANT DRAWINGS AND SPECIFICATIONS.
 2. ALL DIMENSIONS AND LEVELS ARE TO BE CHECKED ON SITE BY THE CONTRACTOR PRIOR TO PREPARING ANY WORKING DRAWINGS OR COMMENCING ON SITE.
 3. THE CONTRACTOR MUST ENSURE AND WILL BE HELD RESPONSIBLE FOR THE OVERALL STABILITY OF THE BUILDING / STRUCTURE / EXCAVATION AT ALL STAGES OF THE WORK.
 4. ALL WORK BY THE CONTRACTOR MUST BE CARRIED OUT IN SUCH A WAY THAT ALL REQUIREMENTS UNDER THE HEALTH AND SAFETY AT WORK ACT ARE SATISFIED.
 5. ALL WORK IS TO BE CARRIED OUT IN COMPLIANCE WITH THE REQUIREMENTS OF THE MCHW AND CHESHIRE WEST & CHESTER COUNCIL.
 6. PRIOR TO ANY EXCAVATION WORKS, THE CONTRACTOR SHALL VERIFY, IF NECESSARY BY GPR SURVEY AND TRIAL HOLES, THE EXACT POSITIONS OF ALL KNOWN SERVICES ON SITE.
 7. GUARDRAIL TO BE INSTALLED IN ACCORDANCE WITH MCHW SPECIFICATION SERIES 0400. REFER TO STANDARD DETAIL DRAWING 18661-WAT-HKF-ZZ-DR-D-950113 FOR GUARDRAIL DETAIL.
 8. GUARDRAIL TO BE INSTALLED AT A MINIMUM OFFSET OF 450mm FROM EDGE OF KERB FACE.
 9. FOR RETRO-REFLECTIVE BOLLARD DETAIL, REFER TO STANDARD DETAIL DRAWING 18661-WAT-HKF-ZZ-DR-D-950112.
 10. FOR SITE CLEARANCE, PLEASE REFER TO 18661-WAT-HSC-ZZ-DR-D-950200 TO 950203.
 11. FOR PROFILES & CROSS SECTIONS, PLEASE REFER TO 18661-WAT-HGN-ZZ-DR-D-950103 TO 950116.
 12. FOR CONTOURS, PLEASE REFER TO 18661-WAT-HGN-ZZ-DR-D-950103 TO 950106.
 13. FOR DRAINAGE, PLEASE REFER TO 18661-WAT-HDG-ZZ-DR-D-950500 TO 950503.
 14. FOR TRAFFIC SIGNS & ROAD MARKINGS, PLEASE REFER TO 18661-WAT-HGN-ZZ-DR-D-951201 TO 9501204.
 14. FOR KERBS & FOOTWAYS, PLEASE REFER TO 18661-WAT-HKF-ZZ-DR-D-951101 TO 951104.
 15. FOR ROAD PAVEMENTS, PLEASE REFER TO 18661-WAT-HPV-ZZ-DR-D-950700 TO 950703.
 16. FOR LOCATION OF EXISTING UTILITIES, PLEASE REFER TO 18661-WAT-HGN-ZZ-DR-D-950001 TO 950004.

CD1	24/04/24	FIRST ISSUE	JR	SW
Rev	Date	Description	By	CHK

Project
A540 RABY ROAD PARK

Title
GENERAL ARRANGEMENT OVERALL PLAN

Client
CHESHIRE WEST AND CHESTER COUNCIL




6th Floor | Trinity Court | 16 John Dalton Street | Manchester M2 6HY
mail@watermangroup.com www.watermangroup.com

Subsidiary
WIP **S0**

Designed By	KB	Director	SW	Waterman Ref	WIE18661
Drawn By	UZ	Date	APR 2024	Scales @ A1	1:250

Project	Originator	Volume	Level	Type	Role	Number	Revision
18661-WAT-HGN-ZZ-DR-D-950120							C01

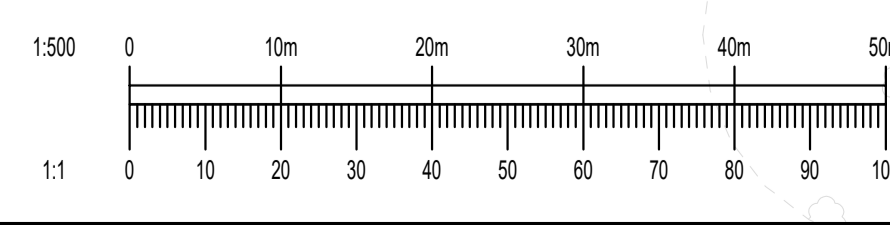

18661-WAT-HGN-ZZ-DR-D-950120 - A540 Raby Road Signal Junction Improvements7_CAD056_Highways